


SYMBOL	TYPE	PRODUCT NAME	CONTACT NAME / NUMBER
		CENTRAL BATTERY UNIT	

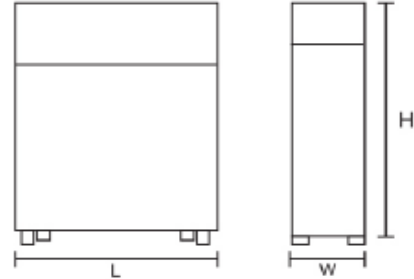

SPECIFICATION	FEATURES
INPUT VOLTAGE , FREQUENCY : 180-265 VAC 50/60 Hz OUTPUT VOLTAGE POWER OUTPUT : 1100W OUTPUT TERMINAL BATTERY : SEAL LEAD ACID 12V 240AH CHARGING TIME : 20 Hrs. LOW VOLTAGE CUT OFF : 1.75 V \pm 0.1V TRANSFER TIME : <0.5 SEC. DURATION : 2 Hrs. LED INDICATOR -AC LINE : RED LED -CHARGE : YELLOW LED -FULL : GREEN LED WEIGHT : 100 Kg.	LOW VOLTAGE CUT OFF 3-STEP CHARGING (SLOW , FAST , TRICKLE) HIGH EFFICIENCY BATTERY CHARGER >85% (SMPS) PRECISION BATTERY CHARGE VOLTAGE (>98%) BATTERY REVERSE POLARITY PROTECTION CHARGER OUTPUT SHORT CIRCUIT PROTECTION WIDE OPERATING INPUT VOLTAGE AC , DC FUSE (INSIDE) LED INDICATE
	INSTALLATION
	FLOOR STANDING WALL MOUNTING
	STANDARD
	TIS.1955-2551 TIS.1102-2538

MODEL	LAMP		DIMENSION (mm.)			REMARK
	VOLTAGE	POWER	L	W	H	
DLCU-112D20		1100W	500	380	820	-