


SYMBOL	TYPE	PRODUCT NAME	CONTACT NAME / NUMBER
		CENTRAL BATTERY UNIT	

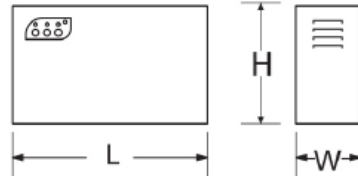

SPECIFICATION	FEATURES
<p>INPUT VOLTAGE , FREQUENCY : 180-265 VAC 50/60 Hz</p> <p>OUTPUT VOLTAGE</p> <p>POWER OUTPUT : 120W</p> <p>OUTPUT TERMINAL</p> <p>BATTERY : SEAL LEAD ACID 12V 26AH</p> <p>CHARGING TIME : 20 Hrs.</p> <p>LOW VOLTAGE CUT OFF : 1.75 V \pm 0.1V</p> <p>TRANSFER TIME : <0.5 SEC.</p> <p>DURATION : 2 Hrs.</p> <p>LED INDICATOR -AC LINE : RED LED</p> <p>-CHARGE : YELLOW LED</p> <p>-FULL : GREEN LED</p> <p>WEIGHT : 8.5 Kg.</p>	<p>LOW VOLTAGE CUT OFF</p> <p>3-STEP CHARGING (SLOW , FAST , TRICKLE)</p> <p>HIGH EFFICIENCY BATTERY CHARGER >85% (SMPS)</p> <p>PRECISION BATTERY CHARGE VOLTAGE (>98%)</p> <p>BATTERY REVERSE POLARITY PROTECTION</p> <p>CHARGER OUTPUT SHORT CIRCUIT PROTECTION</p> <p>WIDE OPERATING INPUT VOLTAGE</p> <p>AC , DC FUSE (INSIDE)</p> <p>LED INDICATE</p>
	INSTALLATION
	<p>FLOOR STANDING</p> <p>WALL MOUNTING</p>
	STANDARD
	<p>TIS.1955-2551</p> <p>TIS.1102-2538</p>

MODEL	LAMP		DIMENSION (mm.)			REMARK
	VOLTAGE	POWER	L	W	H	
DLCU-121D20		120W	360	131	220	-