


| SYMBOL | TYPE | PRODUCT NAME         | CONTACT NAME / NUMBER |
|--------|------|----------------------|-----------------------|
|        |      | CENTRAL BATTERY UNIT |                       |

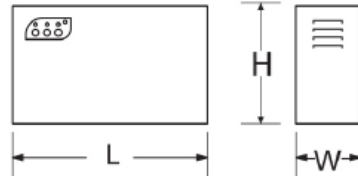

| SPECIFICATION   | FEATURES   |
|---|--|
| <p>INPUT VOLTAGE , FREQUENCY : 180-265 VAC 50/60 Hz</p> <p>OUTPUT VOLTAGE</p> <p>POWER OUTPUT : 30W</p> <p>OUTPUT TERMINAL</p> <p>BATTERY : SEAL LEAD ACID 12V 7AH</p> <p>CHARGING TIME : 20 Hrs.</p> <p>LOW VOLTAGE CUT OFF : 1.75 V <math>\pm</math> 0.1V</p> <p>TRANSFER TIME : &lt;0.5 SEC.</p> <p>DURATION : 2 Hrs.</p> <p>LED INDICATOR -AC LINE : RED LED</p> <p>-CHARGE : YELLOW LED</p> <p>-FULL : GREEN LED</p> <p>WEIGHT : 3.5 Kg.</p> | <p>LOW VOLTAGE CUT OFF</p> <p>3-STEP CHARGING (SLOW , FAST , TRICKLE)</p> <p>HIGH EFFICIENCY BATTERY CHARGER &gt;85% (SMPS)</p> <p>PRECISION BATTERY CHARGE VOLTAGE (&gt;98%)</p> <p>BATTERY REVERSE POLARITY PROTECTION</p> <p>CHARGER OUTPUT SHORT CIRCUIT PROTECTION</p> <p>WIDE OPERATING INPUT VOLTAGE</p> <p>AC , DC FUSE (INSIDE)</p> <p>LED INDICATE</p> |
|   | INSTALLATION   |
|   | <p>FLOOR STANDING</p> <p>WALL MOUNTING</p>   |
|   | STANDARD   |
|   | <p>TIS.1955-2551</p> <p>TIS.1102-2538</p>  |

| MODEL       | LAMP    |       | DIMENSION (mm.) |    |     | REMARK |
|-------------|---------|-------|-----------------|----|-----|--------|
|             | VOLTAGE | POWER | L               | W  | H   |        |
| DLCU-300D20 |         | 30W   | 301             | 80 | 172 | -      |