


SYMBOL	TYPE	PRODUCT NAME	CONTACT NAME / NUMBER
	EM	EMERGENCY LIGHT	

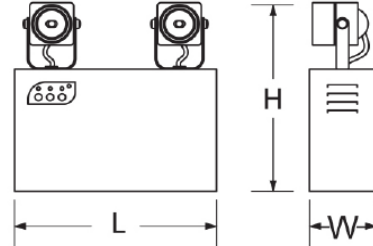

SPECIFICATION	FEATURES
INPUT VOLTAGE , FREQUENCY : 180-265 VAC 50/60 Hz POWER OUTPUT : 2x3.8W LED BATTERY : SEALED LEAD ACID 12V 7.5AH CHARGING TIME : 10-15 Hrs. LOW VOLTAGE CUT OFF : 10.5 V \pm 0.5V TRANSFER TIME : <0.5 SEC. DURATION : 10 Hrs. INDICATC -AC LINE : RED LED -CHARGE : YELLOW LED -FULL : GREEN LED WEIGHT : 4.0 Kg.	LOW VOLTAGE CUT OFF. 3-STEP CHARGING (SLOW , FAST , TRICKLE). HIGH EFFICIENCY BATTERY CHARGER >85%(SMPS). PRECISION BATTERY CHARGE VOLTAGE (>98%). WIDE OPERATING INPUT VOLTAGE . CHARGER OUTPUT SHORT CIRCUIT PROTECTION . LED INDICATE . BATTERY REVERSE POLARITY PROTECTION .
	INSTALLATION
	SURFACE WALL MOUNTED
	STANDARD
	TIS.1955-2551

MODEL	LAMP		DIMENSION (mm.)			REMARK
	WATT	TYPE	W	L	H	
DLEM-238L10	2x3.8W	LED	80	301	262	BATTERY 12V-7.5AH