


SYMBOL	TYPE	PRODUCT NAME	CONTACT NAME / NUMBER
		EMERGENCY LIGHT	

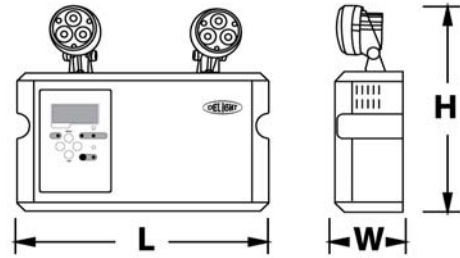

SPECIFICATION	FEATURES
<p>INPUT VOLTAGE , FREQUENCY : 180-265 VAC 50/60 Hz</p> <p>POWER OUTPUT : 2x3.8W</p> <p>BATTERY : SEALED LEAD ACID 12V 7.5AH</p> <p>CHARGING TIME : 14 Hrs.</p> <p>LOW VOLTAGE CUT OFF : 10.5 V \pm 0.5V</p> <p>HIGH VOLTAGE CUT OFF : 13.6 V \pm 0.2V</p> <p>TRANSFER TIME : <0.5 SEC.</p> <p>DURATION : 10 Hrs.</p> <p>LED INDICATOR : AC, LAMP, BATTER FAIL AND CAP, PROGRAM, IR</p> <p>4DIGIT 7SEGMENT DISPLAY : CLOCK, CALENDAR, PROGRAM TEST, ROTATION</p> <p>BUTTON SWITCH : SETTING , LEFT , RIGHT , OPERATE</p> <p>BODY FRONT/BACK : ABS PLASTIC/STEEL SHEET</p> <p>WEIGHT : 4.1 Kg.</p>	<p>LOW VOLTAGE CUT OFF.</p> <p>3-STEP CHARGING (SLOW , FAST , TRICKLE).</p> <p>HIGH EFFICIENCY BATTERY CHARGER >85%(SMPS).</p> <p>PRECISION BATTERY CHARGE VOLTAGE (>98%).</p> <p>WIDE OPERATING INPUT VOLTAGE .</p> <p>CHARGER OUTPUT SHORT CIRCUIT PROTECTION .</p> <p>AC , DC FUSE (INSIDE).</p> <p>4DIGIT 7SEGMENT AND LED DISPLAY.</p> <p>SMART AUTO TEST FUNCTION.</p> <p>INFRARED REMOTE CONTROL (OPTION).</p>
	INSTALLATION
	SURFACE WALL MOUNTED
	STANDARD
	TIS.1955-2551

MODEL	LAMP		DIMENSION (mm.)			REMARK
	WATT	TYPE	W	L	H	
DLEM-23E10	2x3.8W	LED	80	300	245	BATTERY 12V-7.5AH