


SYMBOL	TYPE	PRODUCT NAME	CONTACT NAME / NUMBER
		EMERGENCY LIGHT	

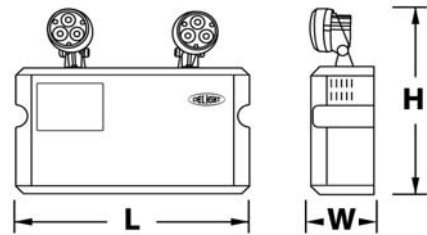

SPECIFICATION	FEATURES
INPUT VOLTAGE , FREQUENCY : 180-240 VAC 50 Hz POWER OUTPUT : 2x3.8W LED BATTERY : 12V 7.5AH CHARGING TIME : 15 Hrs. LOW VOLTAGE CUT OFF : 10.5 ± 0.5 V TRANSFER TIME : < 0.5 Sec. BACK UP TIME : 10 Hrs. AMBIENT TEMPERATURE : 5...40°C LED INDICATOR : AC,CHARGE,FULL WEIGHT : 4.1 Kg.	LOW VOLTAGE CUT OFF 3-STEP CHARGING (SLOW,FAST,TRICKLE) HIGH EFFICIENCY BATTERY CHARGER > 85% (SMPS) PRECISION BATTERY CHARGE VOLTAGE (>98%) CHARGER OUTPUT SHORT CIRCUIT PROTECTION WIDE OPERATING INPUT VOLTAGE AC,DC FUSE (INSIDE) SOFT BUTTON SWITCH
	INSTALLATION
	SURFACE WALL MOUNTED
	STANDARD
	TIS.1955-2551 TIS.1102-2538

MODEL	LAMP		DIMENSION (mm.)			REMARK
	WATT	TYPE	W	L	H	
DLEM-23S10	2x3.8W	LED	80	300	245	BATTERY 12V-7.5AH