


SYMBOL	TYPE	PRODUCT NAME	CONTACT NAME / NUMBER
		EMERGENCY LIGHT	

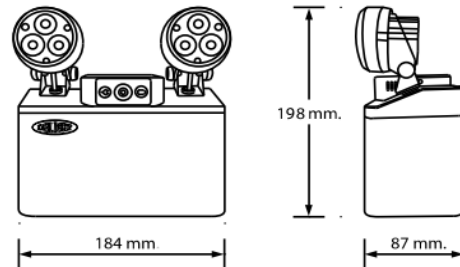

SPECIFICATION	FEATURES
<p>INPUT VOLTAGE , FREQUENCY : 180-240 VAC 50 Hz</p> <p>POWER OUTPUT : 2x6W LED</p> <p>BATTERY : 12V 7.5AH</p> <p>CHARGING TIME : 15 Hrs.</p> <p>BACK UP TIME : 6 Hrs.</p> <p>BATTERY DISCONNECTION 1 : PUSH SWITCH 15 SEC. AFTER AC OFF</p> <p>BATTERY DISCONNECTION 2 : 30 MINUTE AFTER AC AND LAMP OFF (YES/NO SELECTABLE)</p> <p>BATTERY DISCONNECTION 3 : 360 HOURS AFTER AC AND LAMP OFF (FORCED)</p> <p>INDICATOR</p> <p>-AC INDICATOR : LED RED</p> <p>-CHARGE INDICATOR : LED YELLOW</p> <p>-TIMER TEST INDICATOR : LED WHITE (OPTION)</p> <p>WEIGHT : 3 Kg.</p>	<p>COMPACT DESIGN.</p> <p>ALUMINUM EXTRUSION BODY.</p> <p>VO ABS HI GRADE PLASTIC TOP COVER.</p> <p>EASY INSTALLATION LOCK AND UNLOCK.</p> <p>AUTO BATTERY DISCONNECTION FOR LONGER BATTERY LIFE</p> <p>MCU CONTROLLER .</p> <p>SIGN INDICATOR .</p> <p>5 STEP DIMMABLE</p>
	INSTALLATION
	SURFACE WALL MOUNTED
	STANDARD
	TIS.1955-2551
	TIS.1102-2538

MODEL	LAMP		DIMENSION (mm.)			REMARK
	WATT	TYPE	W	L	H	
DLEM-26X6P	2x6W	LED	87	184	190	