


SYMBOL	TYPE	PRODUCT NAME	CONTACT NAME / NUMBER
		EXIT LIGHT	

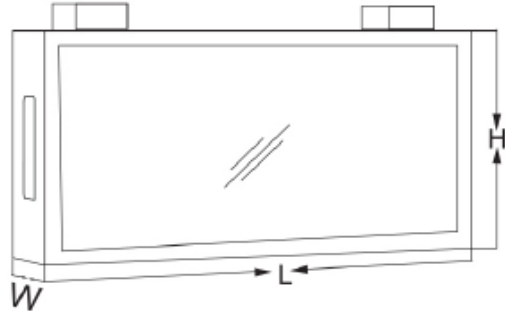

SPECIFICATION	FEATURES
INPUT VOLTAGE , FREQUENCY : 180-265 VAC 50/60 Hz LAMP POWER : 3W BATTERY : NI-MH 1.2Vx3 LED TYPE : LED SMD LIGHT INTENSITY : 128 cd CHARGING TIME : 15 Hrs. LOW VOLTAGE CUT OFF : 2.88 V ± 0.2V TRANSFER TIME : <0.5 SEC. DURATION : 4 Hrs. LED INDICATOR - AC : RED - CHARGE : YELLOW - FULL : GREEN AMBIENT TEMPERATURE : 0-50°C LED LIFE TIME : >50,000 Hrs. IP RATING : IP30 WEIGHT : 1500 g.	CHARGER CIRCUIT PROTECT WHEN BATTERY FAILURE FUSE PROTECTS THE BATTERY WHEN A SHORT CIRCUIT LED INDICATORS(AC,CHARGE,FULL) HIGH EFFICIENCY BATTERY CHARGER (SMPS) 3-STEP CHARGING (SLOW , FAST , TRICKLE) LONG LIFETIME LED LONG CHARGE BATTERY WITH CONSTANT CURRENT LOW-HIGH BATTERY VOLTAGE SHUT OFF MORE ENERGY EFFICIENT THAN CONVENTIONAL MODELS 82% INFRARED REMOTE CONTROL
	INSTALLATION
	SURFACE WALL MOUNTED
	STANDARD
	TIS.1955-2551 ISO 9001-2015

MODEL	LAMP		DIMENSION (mm.)			REMARK
	WATT	TYPE	L	W	H	
DLEX-BL3	3W	LED	354	62	174	BATTERY : NI-MH 1.2V x 3