


SYMBOL	TYPE	PRODUCT NAME	CONTACT NAME / NUMBER
		EXIT LIGHT	

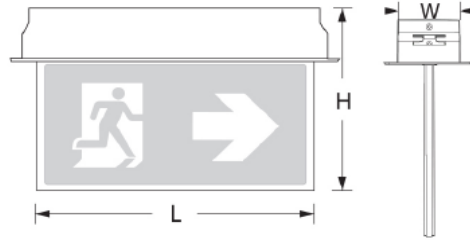

SPECIFICATION	FEATURES
INPUT VOLTAGE , FREQUENCY : 180-265 VAC 50/60 Hz LAMP POWER : 6W BATTERY : 3.6V 1800mA LED TYPE : LED SMD LIGHT INTENSITY : 150 cd CHARGING TIME : 15 Hrs. LOW VOLTAGE CUT OFF : 2.85 V $\pm$ 0.3V /CELL TRANSFER TIME : <0.5 SEC. DURATION : 3 Hrs. LED INDICATOR - AC : RED - CHARGE : YELLOW - FULL : GREEN AMBIENT TEMPERATURE : 0-50°C LED LIFE TIME : >50,000 Hrs. IP RATING : IP30 WEIGHT : 1400 g.	CHARGER CIRCUIT PROTECT WHEN BATTERY FAILURE TWO TYPE SET UP PROGRAM TEST LED INDICATORS(AC,CHARGE,FULL) HIGH EFFICIENCY BATTERY CHARGER (SMPS) SAVING BATTERY WHEN NO CHARGER LOW-HIGH BATTERY VOLTAGE SHUT OFF
	INSTALLATION
	SURFACE WALL MOUNTED
	STANDARD
	TIS.1955-2551 ISO 9001-2015

MODEL	LAMP		DIMENSION (mm.)			REMARK
	WATT	TYPE	W	L	H	
DLEX-RLX6	6W	LED	34	355	220	DOUBLE SIGN