


SYMBOL	TYPE	PRODUCT NAME	CONTACT NAME / NUMBER
		EXIT LIGHT	

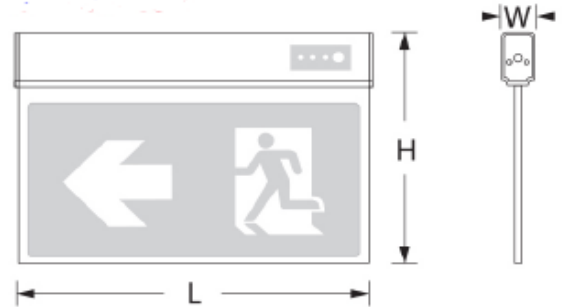

SPECIFICATION	FEATURES
INPUT VOLTAGE , FREQUENCY : 180-265 VAC 50/60 Hz LAMP POWER : 12W BATTERY : 3.6V 2800mA LED TYPE : LED SMD LIGHT INTENSITY : 400 cd CHARGING TIME : 15 Hrs. LOW VOLTAGE CUT OFF : 0.95 V \pm 0.1V /CELL TRANSFER TIME : <0.5 SEC. DURATION : 3 Hrs. LED INDICATOR - AC : RED - CHARGE : YELLOW - FULL : GREEN AMBIENT TEMPERATURE : 0-50 °C LED LIFE TIME : >50,000 Hrs. IP RATING : IP30 WEIGHT : 1900 g.	CHARGER CIRCUIT PROTECT WHEN BATTERY FAILURE. FUSE PROTECTS THE BATTERY WHEN A SHORT CIRCUIT. LED INDICATORS(AC,CHARGE,FULL). HIGH EFFICIENCY BATTERY CHARGER (SMPS). 3-STEP CHARGING (SLOW , FAST , TRICKLE). LONG LIFETIME LED LONG. LOW-HIGH BATTERY VOLTAGE SHUT OFF. MORE ENERGY EFFICIENT THAN CONVENTIONAL MODELS 70%
	INSTALLATION
	RECESSED MOUNTED
	STANDARD
	TIS.1955-2551

MODEL	LAMP		DIMENSION (mm.)			REMARK
	WATT	TYPE	L	W	H	
DLEX-SLG12	12W	LED	364	63	244	BATTERY : NI-MH 1.2V x 3