


SYMBOL	TYPE	PRODUCT NAME	CONTACT NAME / NUMBER
-	-	EMERGENCY LIGHT	SARANYA

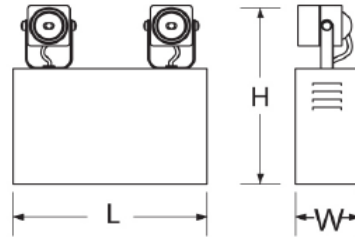

SPECIFICATIONS	FEATURES
<p>INPUT VOLTAGE , FREQUENC): 180-265 VAC 50/60 Hz</p> <p>POWER OUTPUT : 2x9W LED</p> <p>BATTERY : SEALED LEAD ACID 12V 7.5AH</p> <p>CHARGING TIME : 15 Hrs.</p> <p>LOW VOLTAGE CUT OFF : 10.5 V \pm 0.5V</p> <p>HIGH BATTERY CUT OFF : 13.8V max</p> <p>TRANSFER TIME : <0.5 SEC.</p> <p>DURATION : 4 Hrs.</p> <p>INDICATOR : AC , CHARGE , FULL BATTERY</p> <p>BUTTON SWITCH : NO/OFF , TEST , SELECT , OK/CANCELL</p> <p>WEIGHT : 4.1 Kg.</p>	<p>LOW VOLTAGE CUT OFF.</p> <p>3-STEP CHARGING (SLOW , FAST , TRICKLE)</p> <p>HIGH EFFICIENCY BATTERY CHARGER >85%(SMPS)</p> <p>PRECISION BATTERY CHARGE VOLTAGE (>98%)</p> <p>WIDE OPERATING INPUT VOLTAGE .</p> <p>CHARGER OUTPUT SHORT CIRCUIT PROTECTION.</p> <p>AC, DC FUES (INSIDE).</p> <p>PROTECTION AGAINNS WRONG BATTERY POLARITY.</p> <p>5-PROGRAM AUTO TEST SELECTABLE V.</p> <p>SOFT BUTTON SWITCH.</p>
	STANDARD
	TIS. 1955-2551

MODEL	LAMP		DIMENSION (mm.)			REMARK
	WATT	TYPE	W	L	H	
DLEM-209L4ATRT	2x9W	LED	80	301	262	BATTERY 12V-7.5AH